

# Distribution panels


## Cabinets

PDU-5BL			
Qty and type of sockets	Plug	Extra elements	Max. electrical load
5 x Jacket with pin	UNISCHUKO	LED switch	16 A (3680 W)
PDU-8BL			
Qty and type of sockets	Plug	Extra elements	Max. electrical load
8 x Jacket with pin	UNISCHUKO	LED switch	16 A (3680 W)
PDU-9AB			
Qty and type of sockets	Plug	Extra elements	Max. electrical load
9 x Jacket with pin	IEC320C14	-	16 A (3680 W)
PDU-9BB			
Qty and type of sockets	Plug	Extra elements	Max. electrical load
9 x Jacket with pin	UNISCHUKO	-	16 A (3680 W)
PDU-9SB			
Qty and type of sockets	Plug	Extra elements	Max. electrical load
9 x Jacket z SCHUKO	UNISCHUKO	-	16 A (3680 W)

### Features

- Anodized aluminium housing
- Dimensions: 431x44x44 mm (Width x Height x Depth) (without mounting supports)
- Panels adjusted to 1U 19" mounting
- Panels can be mounted vertically
- Equipped with M6 rack bolts
- Socket with pin have protection against accidental placement of other items
- H05W-F-3G 1.5 mm supply cable, width: 3 m
- IP20 protection
- In accordance with CE norms
- Tailor-made construction

## Distribution units - marking

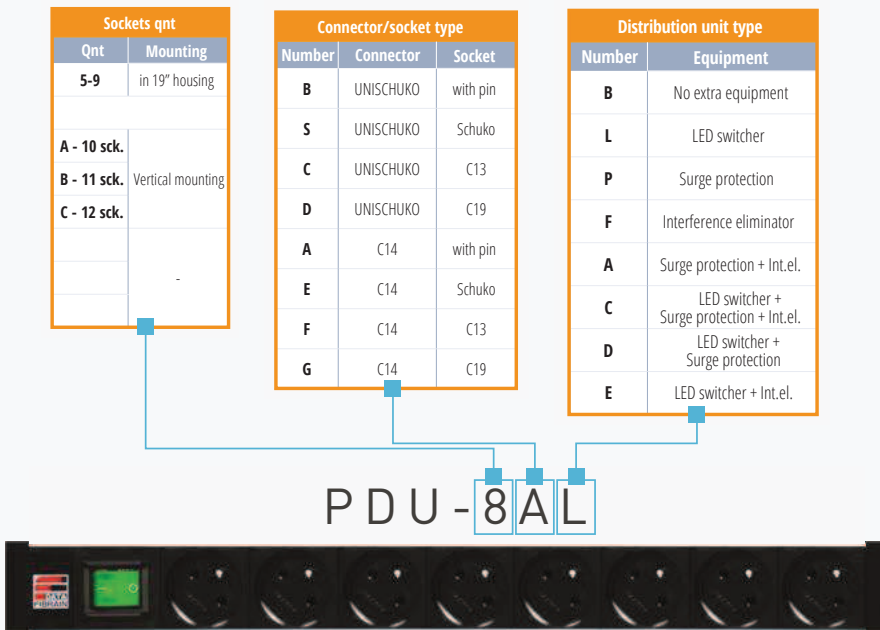

### Optional accessories

- Two-positional LED illuminated switcher
- Extra set of handles to facilitate vertical mounting on an outer part of housing
- Tailored made sockets options
- Adjusted length of a supply cable and a connector
- Ammeter - power meter

### Surge protection

- Reaction time <25 ns
- Absorption of surge energy: 303 J (impulse 10/1000 ns)
- Nominal impulse of power: 7 kA
- Maximum power impulse 10 kA(udar 8/20 ns)

### Interference eliminator

Max. electrical load					
f [MHz]	0.15	1	4.7	10	30
symmetrical mode					
A [dB]	29	42	30	47	43
assymetrical mode					
A [dB]	25	62	64	43	22