

Patchcord
Category 5e FTP

Express 5e

FIBRAIN DATA cabling Express series is fully complied to requirements of category 5e (class D) according to the norms: ANSI/TIA/EIA 568-C.2-1(cat.5e), ISO/IEC 11801, EN 50173, EN 50173-1, IEC 60603-7-4.

Moreover all channel's components are complied to Directive ROHS 2002/95/WE



Commpnetns Express series are characterized by high quality of transmission and mechanical parameters very often exceeding requirements of obeying norms. They fully provide 125 MHz transmission.

Applications:

- 10BASE-T (IEEE 802.3)
- 4/16 Mbps Token Ring (IEEE 802.5)
- 100BASE-VG-AnyLAN
- 100 Mbps TP-PMD (ANSI X3T9.5)
- 100BASE-T (IEEE 802.3)
- 55/155 Mbps ATM
- 1000BASE-T (Gigabit Ethernet)

Norms:

- IEC 60332-1
- ANSI/TIA/EIA 568-C.2 (Cat. 5e)
- ISO/IEC 11801
- IEC 61156-5
- EN 50173, EN 50288

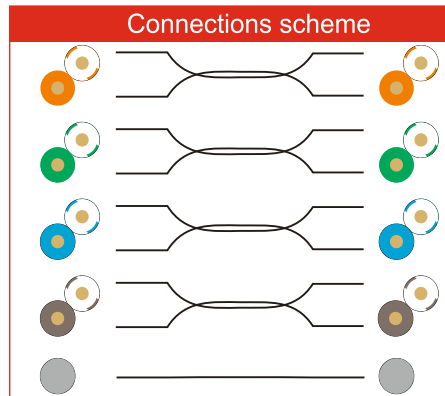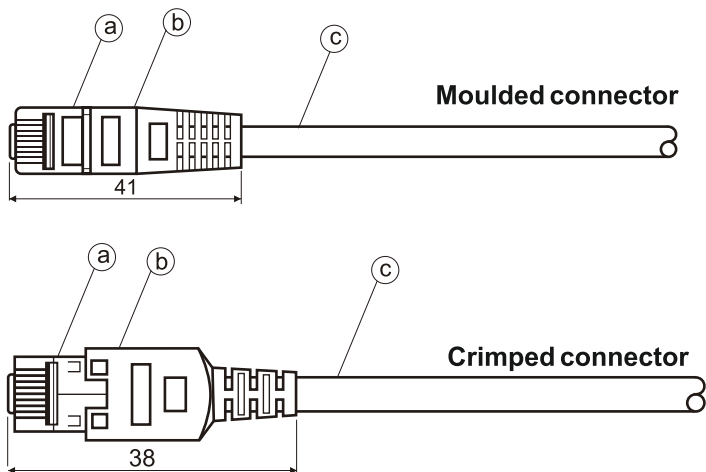

Construction parameters:			
Parametr			
Connector type (a)	for:	moulded	Rj45, shielded, 1:1 acc. TIA/EIA 568B
		crimped	Rj45, shielded, Hirose LSZH TM11, 1:1 acc. TIA EIA 568B
Cover type (b)	for:	moulded	PVC 75A, length in-printed in cover
		crimped	PVC 75A, length in-printed in cover
Cable type (c)	for:	moulded	F/UTP or SF/UTP AWG 24 PVC
		crimped	U/UTP or SF/UTP AWG 26/27 LSOH

Reference: XE **2** **1** **0** **0** **00**

<p>Component kind: 2 - patchcord</p>	<p>Shield type: 1 - F/UTP 2 - SF/UTP</p>	<p>Colour: 0 - grey 1 - blue 2 - green 3 - red 4 - yellow</p>	<p>Connector kind: 0 - mould 1 - crimped</p>	<p>Length: 00 - 0,5 meter 01 - 1 meter 02 - 2 meters 03 - 3 meters 05 - 5 meters 07 - 7 meters 10 - 10 meters 15 - 15 meters 20 - 20 meters 25 - 25 meters 30 - 30 meters</p>
---	---	--	---	--