


## Unloaded mounting modules

### Mounting module FLW-BMP-M1



### Support panel FLW-ABP-M1

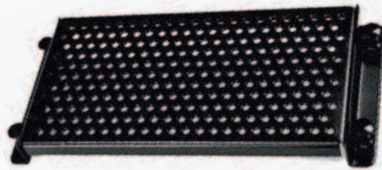

### Adapters



**6x keystone panel**  
FLW-APK-M6

**4x keystone panel**  
FLW-APK-M4

**6x F-connector panel**  
FLW-APFF-M4

### Masking panels with holes FLW-BMP-T2



### Power distribution units PDU-2BB



## Media cabling

#### Features

- Enables installation any teleinformatic component
- Facilitates development of LogiWire solutions
- Equipped with installation sieve (openings: 2.8 mm)

#### Features

- Enables installation of extra panels and adapters
- Facilitates development of LogiWire solutions for "keystone" modules, F-connector
- Adapted to mount 2 panels of adapters

#### Features

- Facilitates mounting "keystone" adapters
- Design to construct indirect connection for transmission media
- 4 or 6 openings to mount "keystone" adapters
- 6 openings to mount FtoF

#### Features

- Cover extra cables inside mounting box
- Protect cables against damage
- Height of cable entry: 30 mm
- 2 cable entries
- Mounting openings for masking frames

#### Features

- 2x socket with pin
- Cable terminated with power unit
- Max. electrical load: 16 A