

# Patchcord cat. 6 FTP/STP

Patchcord cat. 6 FTP/STP


## FibrainDATA Patchcord cat. 6 FTP/STP

patchcord cable 500 MHz cat. 6A



### Patchcord cat. 6 FTP/STP

Manufacturing technology

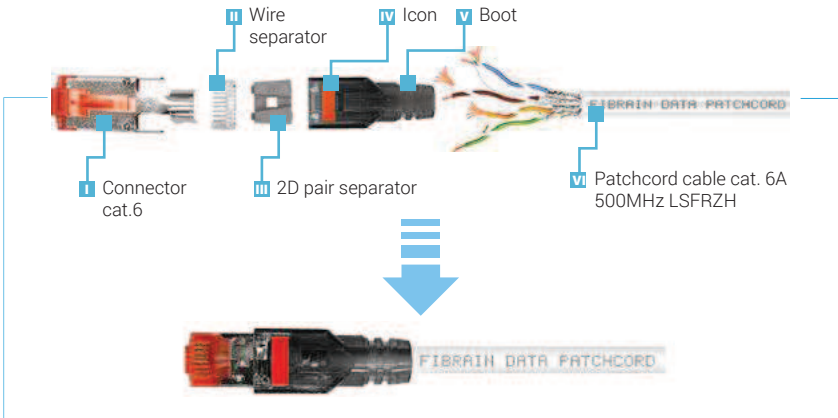

### FTP/STP Distinctive features

**4** 4 cable identification steps

Cable frequency > cat. 6A

10Gbps bandwidth

2D Cross technology


### Applications

- Connection to a user's point
- Connection to a consolidation point
- Supplied in Data Center and consolidation points
- Complete transmission channel




### Identification system

IV cable identification steps

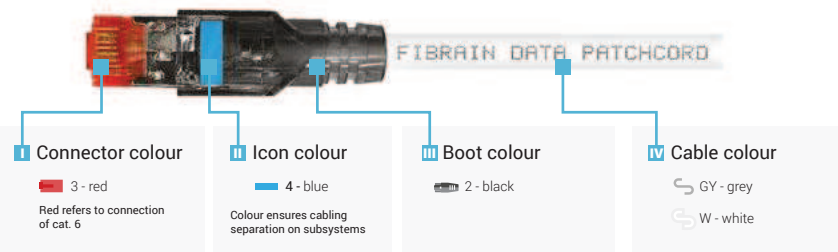

### Manufacturing possibilities

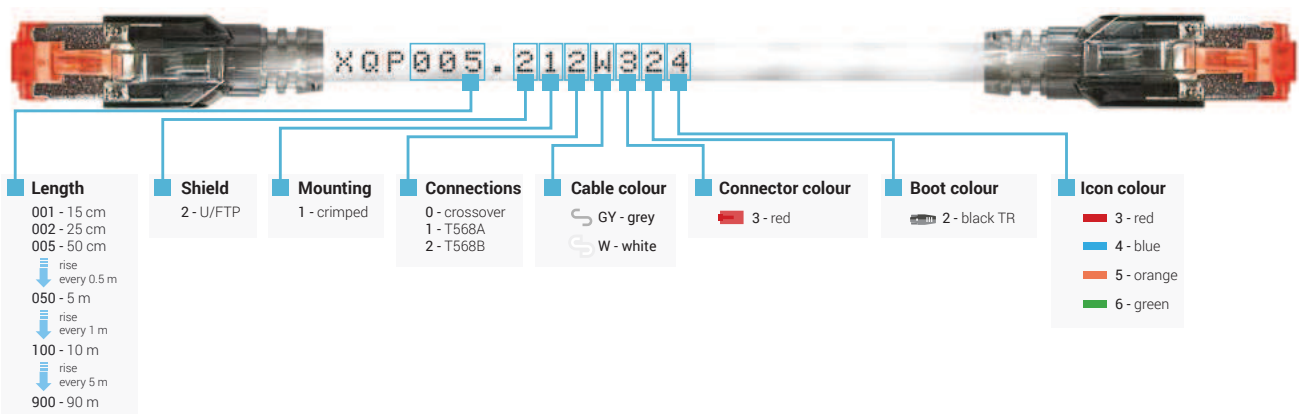

# Patchcord cat. 6 FTP/STP

Patchcord cat. 6 FTP/STP



## Manufacturing

STANDARDS

Cable colour	Length	
 grey	0.5 m	XQP005.212GY324
	1 m	XQP010.212GY324
	2 m	XQP020.212GY324
	3 m	XQP030.212GY324
	5 m	XQP050.212GY324
	10 m	XQP100.212GY324

Cable colour	Length	
 white	0.5 m	XQP005.212W324
	1 m	XQP010.212W324
	2 m	XQP020.212W324
	3 m	XQP030.212W324
	5 m	XQP050.212W324
	10 m	XQP100.212W324



## Features

- Possibility of performing specifically designed solution to manage the infrastructure on a physical structure
- Made by Fibrain with the use of patented components which comply with all necessary mechanical norms in ANSI/ICESA S - 102-732-2009
- Twisted cable pairs ensure full compatibility with dynamic parameters for the dedicated line and transmission channel in accordance with ISO/IEC 11801:2011, EN50173:2011
- Durable elements ensure a number of cycles in accordance with IEC 60603-7-x, TIA/EIA 568-0.2
- Clear marking elements of structured cabling system in order to use a solid system,
- 2D pair separator
- Wire separator